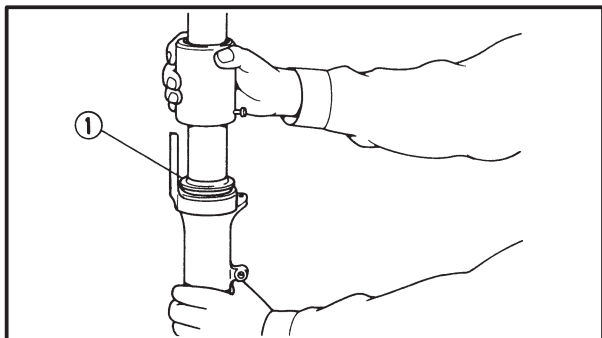


FRONT FORK


CHAS

7. Install:
 - dust seal ①
(with the fork seal driver weight)
8. Fill:
 - front fork leg
(with the specified amount of the recommended fork oil)

**Quantity (each front fork leg)****0.507 L****Recommended oil****Yamaha fork and shock oil 10W
or equivalent**

CAUTION:

- Be sure to use the recommended fork oil. Other oils may have an adverse effect on front fork performance.
- When disassembling and assembling the front fork leg, do not allow any foreign material to enter the front fork.

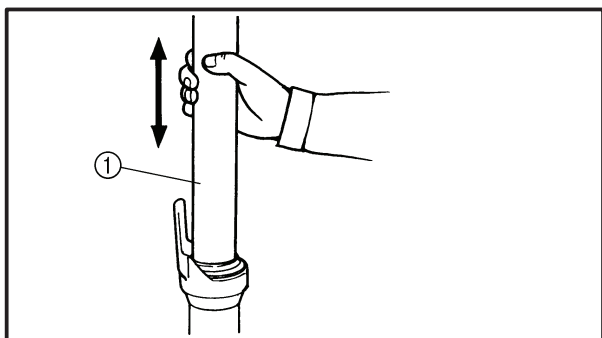

9. Slowly stroke the inner tube ① up and down.
10. Before measuring the fork oil level, wait ten minutes until the oil has settled and the air bubbles have dispersed.

NOTE:

Be sure to bleed the front fork leg of any residual air.